



ALPE-24-O

24"x24" Up/Down Square Architectural LED Pendant



ALPE-24-O Up/down square LED pendant delivers an aesthetic, stylish architectural solution which creates stunning forms only 1.5" high. It combines clean lines and thin, square forms to enhance the decor. The unique design is nearly transparent luminaire when off and excellent uniformity and efficiency when on, reaching 55% downlighting and 45% uplighting distribution, making the illusion of the light floating in mid-air. It is perfect for applications that include conference rooms, open offices, retail settings, anywhere you want to make a statement.

Features

Semi-transparent optics


CCT adjustable 3000K/ 3500K/ 4000K

Wattage selectable

100lm/w, 24"x24"

55% downlight and 45% uplight distribution

External driver with 0-10V dim, dim to 1%



PERFORMANCE

Model#	Dimension	Wattage Selectable	Efficacy	Lumens
ALPE-24-O	24"x24"	50W/40W/30W	100lm/w	Up to 5000lm

All efficacy is $\pm 5\%$ base on different CCT. Check the IES file to gain the accurate data .



ALPE-24-O

24"x24" Up/Down Square Architectural LED Pendant

STRUCTURE

► Optics

High precision light guide made of PMMA material, allows distribution of controlled light to create 45% uplight, 55% downlight light distribution.

► Finish

Extruded aluminum housing.
Powder coat black or white finish.

► Electrical

Driver	External, class 2, high efficiency LED driver.
Dimming	Standard constant current electronic driver with 0-10V dimming, dim to 1% . Tested Dimmers : LEVITON DD710, LUTRON NTSTV-DV, LEGRAND RH4FBL3PTC, LUTRON DVSTV, LEVITON IP710.
THD	<20%
Power Factor	>0.9
Input Voltage	120-277V Standard .120-347V * optional

► LED System

CRI	Minimum 80 color rendering index
CCT	CCT adjustable from 3000K, 3500K and 4000K with a great color consistency.
LED	Life minimum 50,000h with 87.8% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Damp rated in operating ambient temperatures of -20-40°C.

► Approvals

- cULus listed for damp locations
- 5 years limited warranty

► Optional Function

Order Separated LED emergency driver

Optional 16w or 25w high voltage LED emergency driver can be provided if you need and do it wiring in field. For more info or spec sheet please visit our website or contact sales.



Features:

- Field-installable (UL Listed for US & Canada).
- Energy-efficient charger (CEC Title 20 compliant).
- Premium battery backup - 90+ minutes runtime during outages.
- Backed by a 5-Year Limited Warranty.
- Supports most LED luminaires (Up to 200W).
- Universal input voltage (100-277V AC).
- Automatic self-diagnostic testing with monthly, semi-annual, and annual checkups.

► Mounting



Pendant

Dry ceiling or T-Grid ceiling compatible.

Cable lengths of 8ft is standard, 12ft or others are available.




Dry Ceiling / Off Grid




*Please see the installation instruction for more details.

Drop Ceiling / On Grid

Suspending the luminaire in the T-grid. Compatible for various T-grid, including 9/16" Flat, 9/16" Slot, 15/16" Flat.



DIMENSIONS

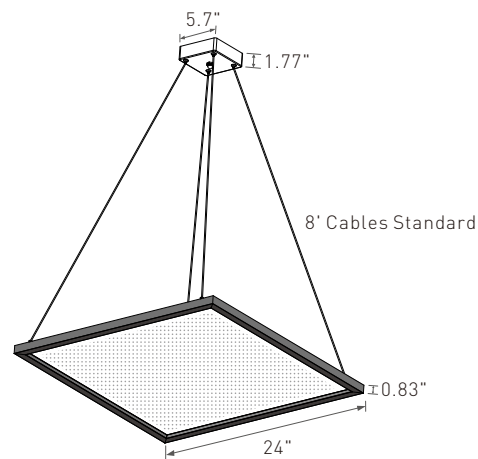

*Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.




ALPE-24-O

24"x24" Up/Down Square Architectural LED Pendant

DISTRIBUTION DIAGRAM

24"x24"/45% Up,55% Down/ 3000K

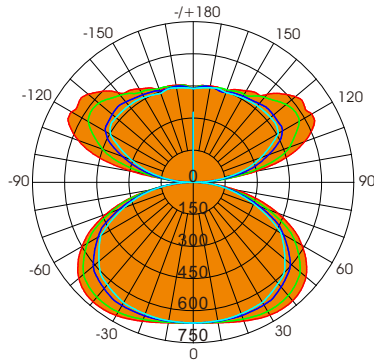

AVERAGE BEAM ANGLE(50%): 360.0°

Test Number: ALPE-24-O

Lumens: 5385 Lm

Watts: 51.68 W

LPW: 104.19 Lm/W

CCT: 3000K

UNIT: cd

— C0/180, 360°

— C30/270, 360°

— C60/240, 360°

— C90/270, 360°

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
5	659.2	657.8	656.7	658.1	659.2
10	666.2	661.0	656.7	661.7	666.5
15	676.7	665.7	656.5	667.1	677.2
20	689.8	671.6	653.8	673.8	690.6
25	704.3	675.2	650.8	678.4	705.6
30	716.3	676.6	647.8	680.9	718.5
35	722.7	675.3	632.5	681.2	726.8
40	721.9	668.3	617.2	676.0	728.2
45	711.9	645.4	599.1	654.3	720.0
50	687.2	615.8	559.0	625.2	697.5
55	643.9	577.8	516.1	587.1	657.1
60	585.3	513.9	473.3	523.0	559.6
65	514.2	441.7	389.8	451.4	527.7
70	419.4	357.3	306.4	364.5	431.7
75	314.8	261.7	223.9	264.4	322.5
80	193.0	167.2	149.6	167.9	192.7
85	58.09	84.03	76.30	85.15	49.39
90	1.092	2.997	2.993	2.758	1.065
95	65.96	120.7	92.26	124.4	47.23
100	294.4	239.6	181.5	245.4	283.9
105	450.6	332.5	268.1	338.4	459.8
110	552.1	416.7	333.5	423.6	569.3
115	619.1	482.3	396.2	491.5	639.8
120	639.5	510.3	458.9	516.6	657.0
125	630.8	519.9	472.3	525.6	652.1
130	623.1	528.2	471.6	536.4	640.5
135	585.0	511.6	469.2	518.3	601.7
140	536.2	488.8	466.8	496.8	546.8
145	510.5	482.1	461.9	490.1	523.8
150	494.4	470.1	456.8	474.8	504.4
155	478.0	461.1	451.7	467.4	486.6
160	450.5	458.7	446.5	463.3	456.1
165	458.7	447.9	453.0	450.9	464.6
170	456.7	451.4	448.8	455.2	460.6
175	454.4	452.1	443.2	452.5	456.4
180	437.7	437.7	437.7	437.7	438.1
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	φ total
0-5	15.72
5-10	62.92
10-15	141.7
15-20	252.1
20-25	393.7
25-30	565.8
30-35	766.5
35-40	992.3
40-45	1239
45-50	1499
50-55	1764
55-60	2023
60-65	2266
65-70	2477
70-75	2645
75-80	2767
80-85	2838
85-90	2861
90-95	2888
95-100	2977
100-105	3128
105-110	3326
110-115	3555
115-120	3803
120-125	4051
125-130	4285
130-135	4499
135-140	4690
140-145	4855
145-150	4997
150-155	5116
155-160	5213
160-165	5288
165-170	5342
170-175	5374
175-180	5385
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	18514	24318
80	30870	23932
75	33781	24034
70	34061	24883
65	33798	25623
60	32518	26294
55	31181	24997
50	29699	24157
45	27965	23535

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006, Inc. at the time of finalizing the order or design. Paraflex Industries 2006, Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006, Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.