



CLWM-X

LED Cylinder Light with Selectable Versatility

Introduction

- ◆ The CLWM-X Cylinder Light is a sleek, modern lighting fixture that combines architectural elegance with functional versatility. Its streamlined cylindrical design provides both visual appeal and performance efficiency.
- ◆ This light fixture offers versatile selection capabilities, including wattage and CCT selectable, distribution selectable and lighting selectable direction, allowing users to easily adjust settings to fit different environments and lighting needs.
- ◆ With standard photocell, ensuring that you can effortlessly manage lighting conditions while maximizing energy efficiency.
- ◆ Whether for kitchens, conference rooms, auditoriums, or exterior facades, the CLWM-X Cylinder Light delivers a balanced mix of style, functionality, and superior illumination.

Product Specifications

Construction:

- ◆ Heavy-gauge aluminum housing.

Optics:

- ◆ CCT Selectable 3000K or 4000K or 5000K (Default setting).
- ◆ Proprietary optics delivers a true uniform, batwing distribution. Narrow and Wide distribution selectable.

Electrical:

- ◆ 0-10V dimmable driver. The dimming wire is not led out from the fixture.
- ◆ Input voltage 120-277Vac for US market, 120-347Vac for Canada market, and 50/60Hz.

Finish:

- ◆ Dark bronze color is standard, White, Black and customized color are available.



20WS

Wattage Selectable



38WS

Wattage Selectable

3000K 4000K 5000K
CCT SELECTABLE



Mounting:

- ◆ Wall mount is suitable for indoor or outdoor applications and easy to modify.

Ambient Temperature:

- ◆ -40°F (-40°C) to 122°F (50°C)

Compliances:

- ◆ cULus listed for wet locations.

Warranty:

- ◆ 5-year limited warranty. Contact Paraflex for complete warranty terms.

Ordering Guide

EXAMPLE: CLWM-X-38WSCSAAA

Model CLWM-X	Wattage XXWS	CCT XXX	Input Voltage AA
CLWM-X	20WS=20W/16W/10W 38WS=38W/31W/19W Note: WS=Wattages Selectable	CSA=3000/4000/5000K Note: CSA=CCT Selectable	LV=120-277/347Vac



CLWM-X


LED Cylinder Light with Selectable Versatility

Performance Data


Model	Wattage	Lumen@5000K	CCT	Input voltage
CLWM-X-20WSCSAAA	(20/16/10)W	Max. 2,400lm	3000K/4000K/5000K Selectable	120-277Vac/ 120-347Vac 50/60Hz
CLWM-X-38WSCSAAA	(38/31/19)W	Max. 4,560lm		

Photometrics

Note: Narrow and Wide distribution can be selected via the switch.



Narrow



Wide

Versatile Selection Capability

CCT Setting
Adjust CCT between 3000/4000/5000K, 5000K default setting

Distribution Setting

Switch	Distribution Selection	Default Setting
1	Full & Narrow Light	Full & Narrow Light
2	Up & Narrow + Down & Wide Light	
3	Up & Wide + Down & Narrow Light	
4	Full & Wide Light	

Power Setting

Product Size	Power Selection (L1/L2/L3)	Default Setting
Size 1	Adjust power between 20/16/10W	20W default setting
Size 2	Adjust power between 38/31/19W	38W default setting

Direction Setting
Adjust direction among Up/Full/Down, Full light default setting
Note: When adjusted to only single-sided lighting, the power is halved.



CLWM-X

LED Cylinder Light with Selectable Versatility

Accessories

Control Options

Comes as standard





CLWM-X-PC-B

Photocell -With Sunshade Cover
(Remove the cover cap to enable the photocell function.)



Electrical Data

Model Series	Wattage(W)	Current (A)				
		Input Voltage (V)				
		120	208	240	277	347
CLWM-X-20WS	10	0.09	0.06	0.05	0.04	0.03
	16	0.15	0.09	0.07	0.06	0.05
	20	0.19	0.11	0.09	0.08	0.06
CLWM-X-38WS	19	0.18	0.11	0.09	0.08	0.06
	31	0.29	0.17	0.14	0.12	0.10
	38	0.35	0.21	0.18	0.15	0.12

Dimensions

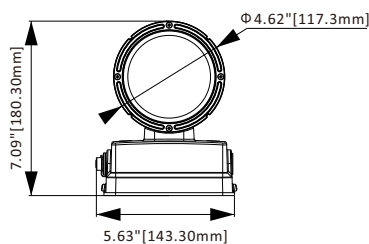

(20/16/10)W

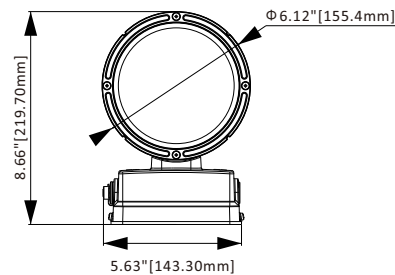

(38/31/19)W

Shipping Information

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
CLWM-X-20WS	26.77 x 13.78 x 8.86	20.90	4	1,752	4,820
CLWM-X-38WS	32.76 x 11.81 x 10.43	27.03	4	1,408	3,880

Note: The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006, Inc. at the time of finalizing the order or design. Paraflex Industries 2006, Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006, Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.