



## DLRC-2-O


2" Deep Regressed LED Downlight



Trimmed With Flange



Trimless in Sheetrock and plaster only

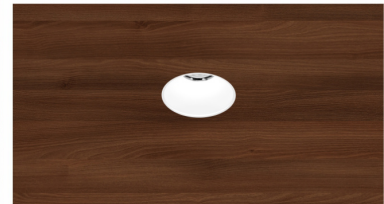

Trimless in Wood Ceiling

This family of 2" aperture recessed downlights are small yet mighty. Compact in size and high in performance, the collection offers an extensive selection of optics, trim styles, configurations, beam spreads, housings, and mounting options-providing the versatility needed for any project. With a wide array of customizable setups, it meets virtually every design requirement. A designer favorite, these downlights ensure exceptional lighting performance for any application.

### Feature

- Architectural Friendly: Modular design, various unique combinations
- Adjustable Ring: 360° rotation and a maximum 30° tilt angle
- 2 in 1 Dimming: 0-10V (Dim to 1%) and TRIAC in one package
- COB LED: 4 Fixed CCT 90+ CRI or Dim to Warm 95+ CRI options.
- Beam Angle: 30° and 50° optics options
- Trimmed or trimless options
- New construction and remodel options for any site condition



### PERFORMANCE

| Wattage Selectable | 30° Beam @ 3000K |                  | 50° Beam @ 3000K |                  | Dim to Warm<br>3000K~2000K 95+ CRI |
|--------------------|------------------|------------------|------------------|------------------|------------------------------------|
|                    | Efficacy         | Delivered Lumens | Efficacy         | Delivered Lumens |                                    |
| 5W                 | 67LM/W           | 335LM            | 73LM/W           | 365LM            | Up to 13W<br>840LM<br>70LM/W       |
| 8W                 | 68LM/W           | 544LM            | 74LM/W           | 592LM            |                                    |
| 10W                | 67LM/W           | 670LM            | 74LM/W           | 740LM            |                                    |
| 13W                | 64LM/W           | 832LM            | 70LM/W           | 910LM            |                                    |
| 16W                | 61LM/W           | 976LM            | 67LM/W           | 1072LM           |                                    |

Remark: The lumens are subject to 3000K, 90+ CRI, 36° beam angle with white round trim. Lumen output may vary ± 5% base on different CCT, beam angle, trim shape and shade.



## DLRC-2-O

2" Deep Regressed LED Downlight

### PRODUCT ORDERING GUIDE

Example: DLRC-2-O-TW-16W-DT1-9027-B30-

| DLRC-2-O                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                         | 16W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | DT1                                                                                                                                                          |                                                                         |                                                                                                                                                                                                             |                                                      | TA                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Model                                                                                                                                                                                                                                                                                                                                                                                                                               | Flange Type                                                                                                                                                                                                                             | Wattage Selectable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Dimming Options                                                                                                                                              | CRI Options                                                             | LED Color Options                                                                                                                                                                                           | Beam Options                                         | Adjustable Holder                                                                                                                              |
| DLRC-2-O<br>Deep regressed LED downlight, 2" aperture, round. Trimmed or trimless.                                                                                                                                                                                                                                                                                                                                                          | <b>TW</b><br>Trimmed With White Flange<br><br><b>TB</b><br>Trimmed With Black Flange<br><br><b>TL</b><br>Trimless<br>▲Install from Above. Service from Above.<br><br><b>WC</b> <small>Made to order</small><br>Trimless in Wood Ceiling | <b>16W</b><br>Up to 16W, 1000LM (5W, 8W, 10W, 13W, 16W Field-selectable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>DT1</b><br>0-10V, (Dim To 1%) Or TRIAC Dimming                                                                                                            | <b>90</b><br>90+ CRI<br><br><b>95</b><br>95+ CRI (ONLY For Dim To Warm) | <b>27</b><br>2700K Cree COB<br><br><b>30</b><br>3000K Cree COB<br><br><b>35</b><br>3500K Cree COB<br><br><b>40</b><br>4000K Cree COB<br><br><b>DW</b><br>Dim to Warm<br>3000K-2000K Bridgelux COB (13W Max) | <b>B30</b><br>Beam 30°<br><br><b>B50</b><br>Beam 50° | <b>TA</b><br>Tilt Angle And 360° Horizontal Adjustment.<br> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                              |                                                                         |                                                                                                                                                                                                             |                                                      |                                                            |
| Trim Shade                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                         | Mounting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                              | Optic Media(Optional)                                                   |                                                                                                                                                                                                             | Emergency(Optional)                                  |                                                                                                                                                |
|  <b>RW</b><br>White<br> <b>RB</b><br>Black<br> <b>RG</b><br>Gold<br> <b>RC</b><br>Chrome Silver | <b>RM</b><br>Remodel (Non-IC, Install from Below)<br><br><b>NF</b><br>New Construction Frame Kit (Non-IC, Install from Above)<br><br><b>NH</b><br>New Construction Housing Insulation Kit (IC, Install from Above)                      | <b>{Blank}</b><br>None<br><br><b>HB</b><br>Honeycomb <br><br><b>WR</b><br>Waterproof Plate ( Wet Rated) <br><br>Decorative Kit (Maximum 10W ONLY)<br> Yellow +  <b>DYB</b> <b>DYW</b><br> Green +  <b>DGB</b> <b>DGW</b><br> Transparent +  <b>DTB</b> <b>DTW</b><br> Blue +  <b>DBB</b> <b>DBW</b><br> Red +  <b>DRB</b> <b>DRW</b> | <b>{Blank}</b><br>None<br><br><b>EM</b><br>16W LED Emergency Driver<br> |                                                                         |                                                                                                                                                                                                             |                                                      |                                                                                                                                                |




## DLRC-2-O

2" Deep Regressed LED Downlight

### STRUCTURE

#### LED System

|              |                                                                                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| LED          | Powered by CREE or Bridgelux high efficiency COB LED chip.                                                                                        |
| CRI          | 90+ for fixed CCT or 95+ CRI for Dim to Warm, producing outstanding illumination at a tight chromaticity specification and color binning process. |
| CCT          | 2700K, 3000K, 3500K and 4000K fixed CCT with a great color consistency or Dim to Warm from 3000K to 2000K.                                        |
| Light Engine | Aluminum housing acting as the heat sink to maximize life. The temperature of all heatsinks are controlled at 60-70°C.                            |
| Heatsink     |                                                                                                                                                   |

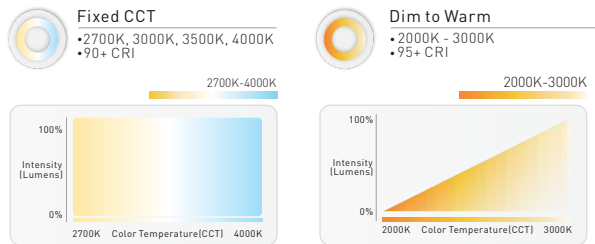

#### Lens

Classic reflector-like design provides high lighting transmittance. It effect in light control and anti-glare with side facula and fade-out facula. The MR16 standard size (diameter 1.96") design make them widely practical. Available in 30° and 50° beam angles, beam spreads are interchangeable which can be easily swapped out in the field without tools.

#### Trim Finish / Shade

Powder coat white and black finishes offer uniform finish providing long term performance and superior aesthetic, compatible for multiple trim shades.



#### Installation

Twist & Lock feature for easy trim installation.  
Durable tension clips are allowing for fast and easy flush installation.

#### Finish

Forged Aluminum

#### Electrical

|               |                                                                                                                                                                                                                                                                                             |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LED Driver    | It is powered by Class 2 high efficiency LED driver, with a standard 0-10V dimming which continuous dims to 1% or Triac dimming that works with many types of controls. Thermal overload protection shuts down the luminaire when system temperatures exceed designed operating conditions. |
| THD           | <20%                                                                                                                                                                                                                                                                                        |
| Power Factor  | >0.9                                                                                                                                                                                                                                                                                        |
| Input Voltage | Standard electronic drivers are cULus recognized and available for 110-277V AC.                                                                                                                                                                                                             |
| Environment   | Environment damp rated for ambient operating temperature of -20°C to +40°C (-4° to +104°F)                                                                                                                                                                                                  |

#### Listings

- cULus listed for damp locations
- Five-year warranty for parts and components. (Labor not included)

#### NOTES:

- Ambient temperatures at fixture location should not exceed 40°C during normal operation.
- For interior use only

#### Dimmer Compatible

0-10V Dimming (Dim to 1%)

| LEVITON DD710 | LUTRON NTSTV-DV | LEGRAND RH4FBL3 | LUTRON DVSTV | LEVITON IP710 |
|---------------|-----------------|-----------------|--------------|---------------|
| ✓             | ✓               | ✓               | ✓            | ✓             |

TRIAC Dimming

| LUTRON DV600P | LUTRON DVCL-153P | LEVITON 6683 | LUTRON DV603P | LEVITON 6672 | LUTRON S-603P | LUTRON LG-600P |
|---------------|------------------|--------------|---------------|--------------|---------------|----------------|
| ✓             | ✓                | ✓            | ✓             | ✓            | ✓             | ✓              |

| LUTRON MSCL-DP153M | LUTRON TGCL-153DH | LUTRON SCL-153P | LUTRON CTCL-153P | LUTRON CT-603PG |
|--------------------|-------------------|-----------------|------------------|-----------------|
| ✓                  | ✓                 | ✓               | ✓                | ✓               |





## DLRC-2-O

2" Deep Regressed LED Downlight

### DIMENSIONS

DLRC-2-O-TW / TB



2" Round Trim



Opening Size Reference:  $\phi 2-1/4"$  (Round Hole)

DLRC-2-O-TL

2" Round Trimless





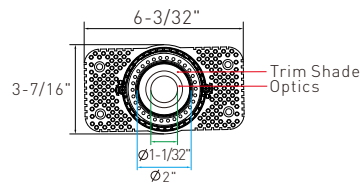


Opening Size Reference:  $\phi 3-1/2"$  (Round Hole)

▲ Install from Above. Service from Above.

DLRC-2-O-WC

2" Round Trimless in Wood Ceiling

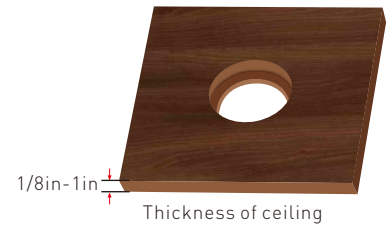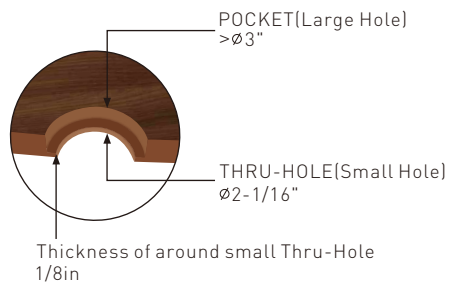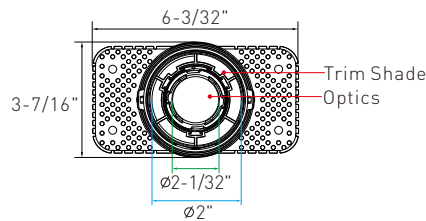




## DLRC-2-O

2" Deep Regressed LED Downlight


### MOUNTING

#### Remodel(NON-IC Rated, Install From Below)

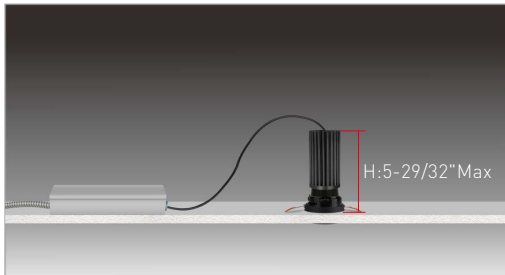


It can be installed in existing ceilings for remodel application. Simple cut a hole in existing drywall ceilings.


**Remote Driver Box**  
1 Downlight per Remote Driver

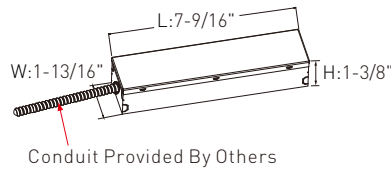

**Mounting Space Required**  
Up to 10W: Min 8"×8"×8"






Up to 16W: Min 17"×10"×8"



#### New Construction-Frame Kit (NON-IC Rated, Install From Above)


A rough-in frame option is available for all new constructions and a variety of ceiling types. LED driver box rests on the frame kit by magnet when installed as shown below.

**Mounting Space Required**  
Frame Kit (NON-IC)  
Min 14"×19"×8"  
Max 24"×19"×8"

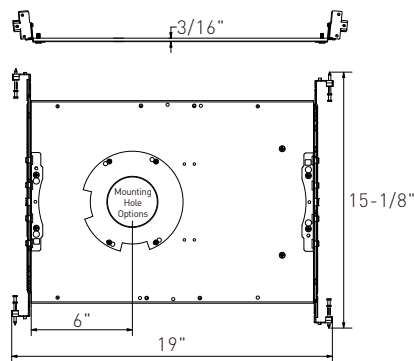


**Mounting Hole Options**

**2" Round Trim**






**2" Round Trimless**



#### New Construction-Housing Insulation Kit (IC Rated, Install From Above)

An IC-rated housing frame kit allows placement of 2inch LED downlight in direct contact with insulation.

**Mounting Space Required**  
Housing Insulation Kit (IC)  
Min 14"×19"×7-5/16"  
Max 24"×19"×7-5/16"

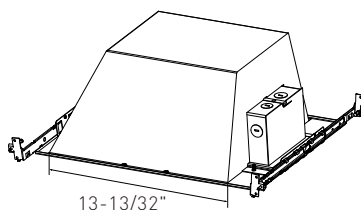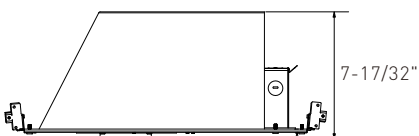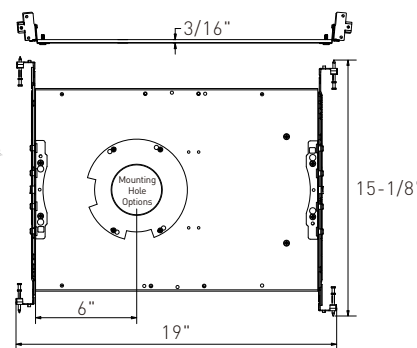




## DLRC-2-O

2" Deep Regressed LED Downlight

### DISTRIBUTION DIAGRAM

2" / 10W / 3000K / 50°

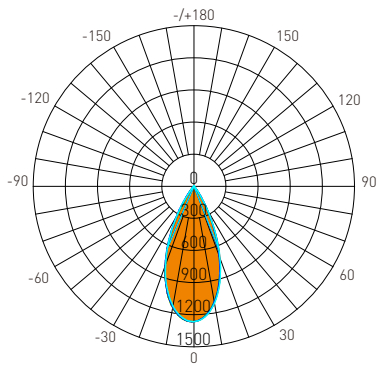

AVERAGE BEAM ANGLE(50%): 44.7°

Lumens: 711.83 Lm  
Watts: 10 W  
LPW: 74.02 Lm/W  
CCT: 3000K

UNIT: cd  
— C0/180, 44.7 °  
— C30/210, 44.6 °  
— C60/240, 44.7 °  
— C90/270, 44.9 °

Zonal Flux Diagram

| τ   | C0                    | C45    | C90    | C135   | C180   |
|-----|-----------------------|--------|--------|--------|--------|
| 10  | 1103                  | 1098   | 1108   | 1136   | 1149   |
| 20  | 707.5                 | 695.1  | 709.7  | 754.8  | 784.6  |
| 30  | 235.5                 | 250.8  | 252.5  | 286.5  | 288.0  |
| 40  | 28.5                  | 34.08  | 34.15  | 43.27  | 43.93  |
| 50  | 4.399                 | 4.663  | 4.221  | 4.627  | 4.103  |
| 60  | 3.207                 | 3.187  | 3.495  | 3.034  | 3.023  |
| 70  | 1.180                 | 1.284  | 1.499  | 1.207  | 1.123  |
| 80  | 0.1182                | 0.1257 | 0.3123 | 0.0988 | 0.0806 |
| 90  | 0                     | 0      | 0      | 0      | 0      |
| 100 | 0                     | 0.0317 | 0      | 0.0137 | 0      |
| 110 | 0.2477                | 0.2844 | 0.2788 | 0.2483 | 0.0813 |
| 120 | 0.8568                | 0.9700 | 0.9235 | 0.8664 | 0.3527 |
| 130 | 1.926                 | 2.035  | 2.005  | 1.900  | 1.112  |
| 140 | 3.240                 | 3.329  | 3.313  | 3.208  | 2.277  |
| 150 | 4.387                 | 4.428  | 4.405  | 4.366  | 3.568  |
| 160 | 4.907                 | 4.838  | 4.888  | 4.897  | 4.398  |
| 170 | 4.840                 | 4.838  | 4.906  | 4.893  | 4.695  |
| 180 | 4.930                 | 4.919  | 4.942  | 4.988  | 4.903  |
| DEG | LUMINOUS INTENSITY:cd |        |        |        |        |

Zonal Lumens

| τ        | φ total |
|----------|---------|
| 0-10     | 113.9   |
| 10-20    | 377.2   |
| 20-30    | 605.2   |
| 30-40    | 683.9   |
| 40-50    | 696.3   |
| 50-60    | 699.7   |
| 60-70    | 702.0   |
| 70-80    | 702.8   |
| 80-90    | 702.9   |
| 90-100   | 702.9   |
| 100-110  | 703.0   |
| 110-120  | 703.3   |
| 120-130  | 704.2   |
| 130-140  | 705.9   |
| 140-150  | 708.0   |
| 150-160  | 710.0   |
| 160-170  | 711.4   |
| 170-180  | 711.8   |
| UNIT: lm |         |

Luminance cd/(m2)

| G(DEG) | C0/180 | C90/270 |
|--------|--------|---------|
| 85     | 155    | 312     |
| 80     | 340    | 899     |
| 75     | 1118   | 1658    |
| 70     | 1723   | 2191    |
| 65     | 2260   | 2944    |
| 60     | 3204   | 3496    |
| 55     | 3327   | 3276    |
| 50     | 3418   | 3284    |
| 45     | 5071   | 6881    |

#### Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006, Inc. at the time of finalizing the order or design. Paraflex Industries 2006, Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006, Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.