ECCC-B

Chicago Approved LED Exit/Stair & Emergency Combo


STANDARD | OPTIONAL

UL LISTED | DAMP LOCATION | MOUNTING CANOPY | CHICAGO APPROVED | ALL LED | REMOTE CAPACITY

Chicago Approved Exit / Stair Sign & Emergency Steel Combo



Dimensions, inches

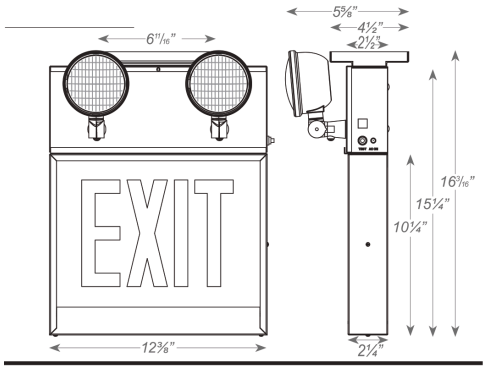

Illumination

- Long lasting, energy efficient white LED exit sign illumination.
- Single or double face configuration.
- Two 6V 5.3W adjustable white LED lamp heads.

Electrical

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing

- Durable 20-gauge steel construction.
- White or black finish.

Options

- RC: Remote capacity of up to 10.0 watts.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C · 50°C).
- Meets city of Chicago requirements.

Ordering Guide

Example: ECCC-B-1-R-W-NA

#	Field	Options
1	**Model**	ECCC-B (Chicago approved exit / stair sign & emergency steel combo)
2	**No. of faces**	1 = Single face 2 = Universal single / double face
3	**Letter color**	R = Red
4	**Housing color**	W = White B = Black
5	**Options**	RC = Remote capacity
6	**Arrows (Exit)**	NA = No arrow DA = Double arrow RA = Right arrow[1] LA = Left arrow[1] LARA = Left/Right arrow[2]
7	**Arrows (Stair)**	SW-NA = No arrow SW-DA = Double arrow SW-RA = Right arrow[1] SW-LA = Left arrow[1] SW-LARA = Left/Right arrow[2]

[1]Available in single face configuration only [2]Available in double face configuration only

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com