ECDC-B


Die-Cast Aluminum LED Exit & Emergency Combo

STANDARD | OPTIONAL

Exit & Emergency Die-Cast Aluminum Combo



Dimensions, inches

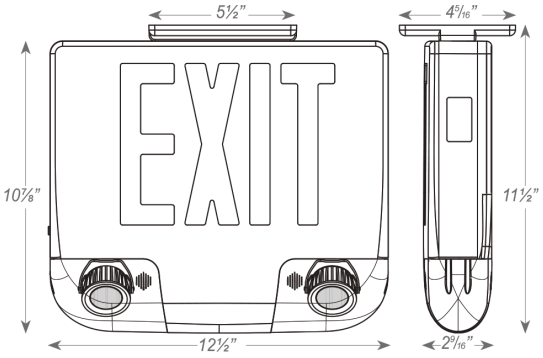

Illumination

- Ultra bright, energy efficient, long life Red or Green LED exit sign illumination.
- High performance premium grade, ultra bright white LED lamps.
- 3W (1 LED x 3 watts) per head.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 8.4V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity available as an option.

Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing

- First premium grade die-cast combo in the market. Unique new design provides spec grade EXIT sign with LED lamp heads in one low profile housing.
- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Quick-snap face plate closure.
- Unique design allows double face conversion in the field.

Options

- RC: Remote capacity of up to 3 watts.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: ECDC-B-1-R-B-A-EM

#	Field	Options
1	**Model**	ECDC-B (exit & emergency die-cast aluminum combo)
2	**No. of faces**	1 = Single face 2 = Double face 3 = Universal single / double face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black A = Aluminum
5	**Face panel**	W = White B = Black A = Aluminum
6	**Battery**	EM = Battery back-up (standard)
7	**Options**	RC = Remote capacity

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com