ECLL-B

Low Level LED Exit & Emergency Combo


STANDARD

Low Level Exit & Emergency Thermoplastic Combo



U.S. Patent Nos.: 10,373,534; D865,061

Dimensions, inches

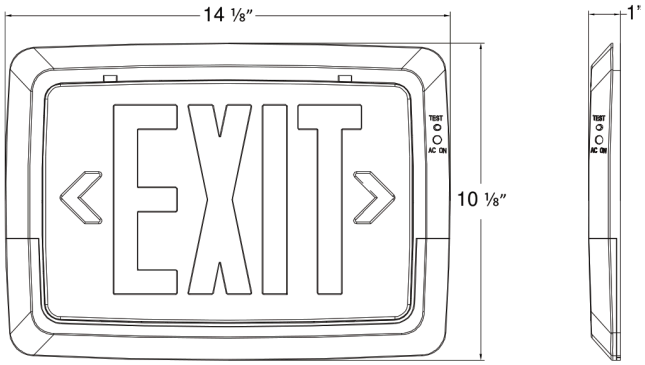

Illumination

- Long lasting, efficient ultra bright white LED light strip.
- 3.1 watts (24 LEDs x 0.13 watts) per light strip.
- High performance, smooth, chrome plated, metallized reflector with acrylic UV-stabilized lens for optimal light distribution.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination.

Electrical

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and the white LED light strip for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Universal knockout pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.
- Patented specification-grade, low profile thin plastic design is ideal for low level applications.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.
- Suitable for use in Floor Proximity Installation.

Ordering Guide

Example: ECLL-B-1-R-W

#	Field	Options
1	**Model**	ECLL-B (low level exit & emergency thermoplastic combo)
2	**No. of faces**	1 = Single face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com