PARAFLEX LED LIGHTING

ECLP-B

Low Profile LED Exit & Emergency Combo


STANDARD | OPTIONAL

CALIFORNIA ENERGY COMMISSION | UL LISTED | DAMP LOCATION | MOUNTING CANOPY | ALL LED | SELF DIAGNOSTIC | REMOTE CAPACITY | HIGH LUMEN | SPECIAL VOLTAGE 208V 220V 240V

Low Profile Exit & Emergency Thermoplastic Combo



Dimensions, inches

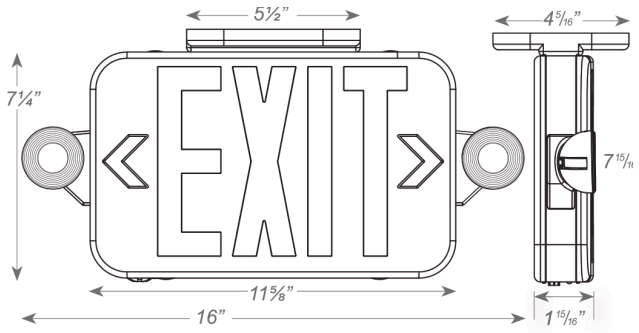

Illumination

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.
- Selectable Red/Green version available. See ordering guide below.

Electrical

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap thermoplastic mounting canopy included, provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

Options

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C · 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: ECLP-B-3-R-W

#	Field	Options
1	**Model**	ECLP-B (low profile exit & emergency thermoplastic combo)
2	**No. of faces**	3 = Universal single / double face
3	**Letter color**	R = Red G = Green RG = Red/Green (field selectable)
4	**Housing color**	W = White B = Black
5	**Options**	RC = Remote capacity[1] HL = High lumen LED[1] SDT = Self-diagnostics[2] SPV = 120/230 Volt 50/60Hz[2]

[1]-HL and -RC options cannot be combined; 0.5W of remote capacity is standard with -HL [2]Not available with RG units

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com