ECLT-B

Lightpipe LED Exit & Emergency Combo


STANDARD | OPTIONAL

Exit & Emergency Lightpipe Thermoplastic Combo



U.S. Patent No.: 8,024,880

Dimensions, inches

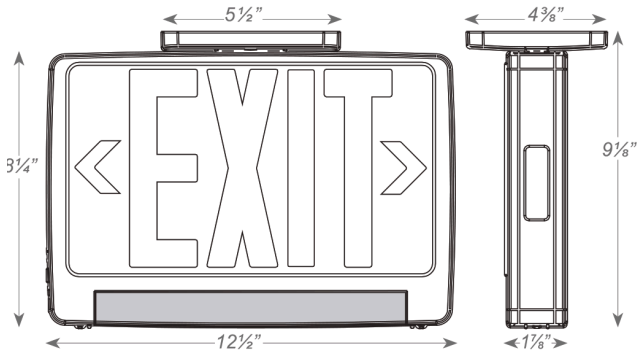

Illumination

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Light Pipe" lens for optimal light distribution.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Light Pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap-out chevron directional indicators.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: ECLT-B-2-R-W-RC

#	Field	Options
1	**Model**	ECLT-B (exit & emergency lightpipe thermoplastic combo)
2	**No. of faces**	2 = Universal single / double face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black
5	**Options**	RC = Remote capacity (standard) SDT = Self-diagnostics

Special voltage and SALIDA face plate options available. Please contact Paraflex.

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com