ECNY-B

NYC Compliant LED Exit & Emergency Combo

STANDARD

New York City Compliant LED Exit & Incandescent Emergency Steel Combo



Illumination

- Two fully adjustable 12W, glare-free lamp heads with field installable third emergency lighting head included.
- Knockouts provided on sides of unit to relocate lamp heads.
- High performance smooth metal reflector and glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LED exit sign illumination.
- New York City compliant 8" EXIT letters.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Mounting hardware provided for back surface wall mount.
- Top and side knockouts provided for conduit feed applications.


Housing

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout chevron directional indicators on exit face.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Dimensions, inches

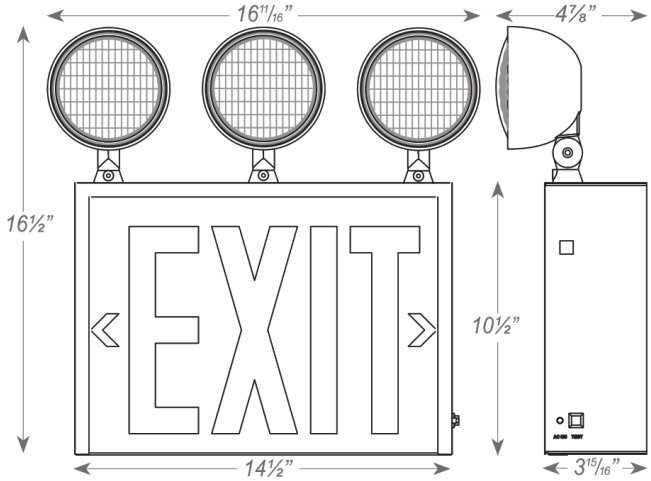

Ordering Guide

Example: ECNY-B-1-R-W-3

#	Field	Options
1	**Model**	ECNY-B (New York City compliant LED exit & incandescent emergency steel combo)
2	**No. of faces**	1 = Single face
3	**Letter color**	R = Red
4	**Housing color**	W = White B = Black
5	**No. of heads**	3 = Standard NH = No heads

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com