ECRM-B

Running Man LED Sign & Emergency Combo


STANDARD | OPTIONAL

ALL LED | DAMP LOCATION | MOUNTING CANOPY | HIGH LUMEN | SELF DIAGNOSTIC | REMOTE CAPACITY

Running Man Sign & Emergency Thermoplastic Combo



Dimensions, inches

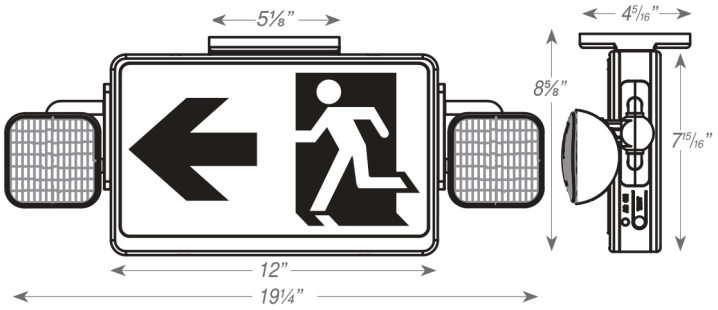

Illumination

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

Electrical

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- RC: Remote capacity of 3.0 watts.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C · 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for emergency lighting equipment.

Ordering Guide

Example: ECRM-B-2-W

#	Field	Options
1	**Model**	ECRM-B (running man sign & emergency thermoplastic combo)
2	**No. of faces**	2 = Universal single / double face
3	**Housing color**	W = White B = Black
4	**Options**	SDT = Self-diagnostics RC = Remote capacity HL = High lumen

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com