ECRT-B


Running Man LED Sign & Emergency Combo

STANDARD | OPTIONAL

Running Man Sign & Emergency Lightpipe Thermoplastic Combo



Dimensions, inches

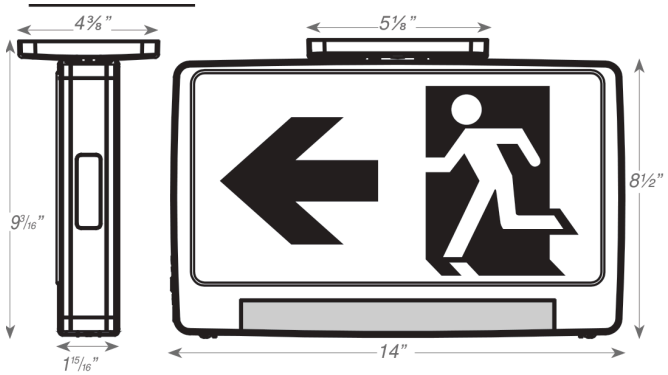

Illumination

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Ultra bright, energy efficient, long lasting white LED provides even, fully illuminated panel.

Electrical

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 1.0W standard.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Right, Left and No Arrow) pictogram legends.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C · 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for emergency lighting equipment.

Ordering Guide

Example: ECRT-B-2-W-RC

#	Field	Options
1	**Model**	ECRT-B (running man sign & emergency lightpipe thermoplastic combo)
2	**No. of faces**	2 = Universal single / double face
3	**Housing color**	W = White B = Black
4	**Options**	RC = Remote capacity (standard) SDT = Self-diagnostics

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com