ECWC-B

Wet Location LED Exit & Emergency Combo


STANDARD | OPTIONAL

E | LISTED | ALL LED | WET LOCATION | MOUNTING CANOPY | COLD | TAMPER PROOF | REMOTE CAPACITY

Low-Profile Wet Location Exit & Emergency Combo



Dimensions, inches

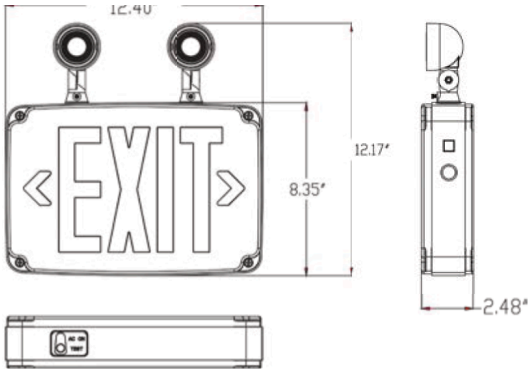

Illumination

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0W (1 LED x 1.0 watt) per head.
- Adjustable LED lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient, field selectable Red or Green LED EXIT sign illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, Off-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Housing

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

Options

- CW: Optional high capacity battery for extreme cold temperature applications (-20°C · 50°C).
- RC: Remote capacity of up to 2.0 watts.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: ECWC-B-1-RG-W

#	Field	Options
1	**Model**	ECWC-B (low-profile wet location exit & emergency combo)
2	**No. of faces**	1 = Single face 2 = Double face (blank) = Universal single / double face
3	**Letter color**	RG = Red/Green (field selectable)
4	**Housing color**	W = White B = Black G = Gray (with white faceplate)
5	**Options**	CW = Cold weather[1] RC = Remote capacity[1] TP = Tamper-proof screws

[1]CW and RC not available together

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com