EUWL-B

Wet Location LED Emergency Unit

STANDARD | OPTIONAL

LISTED | ALL LED | WET LOCATION | COLD | ASSEMBLED IN U.S.A. | BC | SELF DIAGNOSTIC

MR-16 Wet Location Semi-Recessed Polycarbonate Emergency Unit



Illumination

- Two fully adjustable semi-recessed, round LED MR16 lamp heads for optimal light distribution.
- Ultra-bright, energy efficient, long-life white LED lamps provide up to 76-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- 7.0W high lumen white LED lamps (PLED) standard.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Wall mount via knockouts on the back of the housing.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.


Options

- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-25°C · 40°C).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- CEC: Certified to CEC under Title 20 Regulations.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C · 40°C).

Dimensions, inches

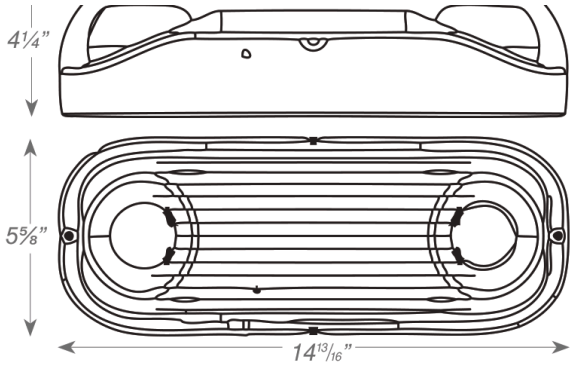

Ordering Guide

Example: EUWL-B-PLED

#	Field	Options
1	**Model**	EUWL-B (wet location semi-recessed polycarbonate emergency unit)
2	**Housing color**	(blank) = Gray B = Black
3	**Lamp**	PLED = 7.0 W high lumen white LED lamps (standard)
4	**Options**	CW = Cold weather USA = Assembled in USA SDT = Self-diagnostics[1] CEC = Certified to Title 20

[1]SDT not available with CEC option

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com