EXCR-B

Chicago Approved LED Exit/Stair Sign

STANDARD

Chicago Approved Recessed Edgelit Aluminum Exit / Stair Sign



Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV-stabilized, silk-screened acrylic panels provide consistent, uniform illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Compatible with drywall or drop-thru ceiling mount installations.
- Wall mount capability optional.

Housing

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Also available in optional white finish.
- Single or double face configurations.


Options

- WM: Allows for the unit to be wall recessed mounted.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C · 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago sign and plenum requirements.
- Certified to CEC under Title 20 Regulations.

Dimensions, inches

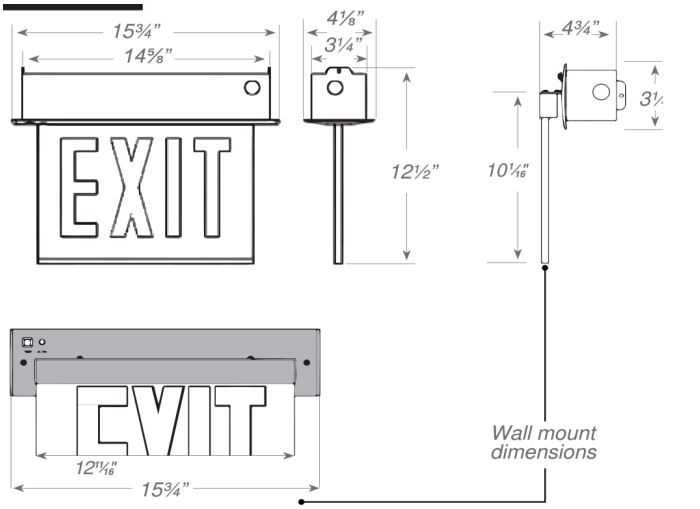

Ordering Guide

Example: EXCR-B-1-RW-A-EM-NA

#	Field	Options
1	**Model**	EXCR-B (Chicago approved recessed edgelit aluminum exit / stair sign)
2	**No. of faces**	1 = Single face 2 = Double face
3	**Letter color**	RW = Red on white
4	**Trim plate**	A = Aluminum W = White
5	**Battery**	(blank) = AC only EM = Battery back-up
6	**Options**	WM = Wall mount[1]
7	**Arrows (Exit)**	-NA = No arrow -DA = Double arrow -RA = Right arrow[1] -LA = Left arrow[1] -LARA = Left/Right arrow[2]
8	**Arrows (Stair)**	-S-NA = No arrow -S-DA = Double arrow -S-RA = Right arrow[1] -S-LA = Left arrow[1] -S-LARA = Left/Right arrow[2]

[1]Available in single face configuration only [2]Available in double face configuration only

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com