EXDC-B


Die-Cast Aluminum LED Exit Sign

STANDARD | OPTIONAL

Die-Cast Aluminum Exit Sign



Dimensions, inches

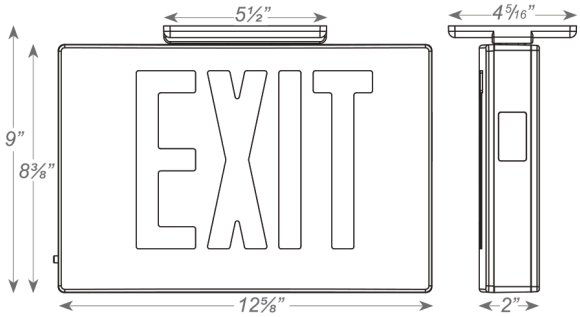

Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs exit sign illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: EXDC-B-1-R-B-A-EM

#	Field	Options
1	**Model**	EXDC-B (die-cast aluminum exit sign)
2	**No. of faces**	1 = Single face 2 = Double face 3 = Universal single / double face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black A = Aluminum
5	**Face panel**	W = White B = Black A = Aluminum
6	**Battery**	(blank) = AC only EM = Battery back-up
7	**Options**	SDT = Self-diagnostics[1] TP = Tamper-proof USA = Assembled in USA
8	**Dual circuit**	2C-120 = Dual circuit with 120V input[2] 2C-277 = Dual circuit with 277V input[2]

[1]Available only with EM units [2]Not available with EM units
Special voltage options available. Please contact Paraflex.

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com