# EXND-B

NYC Compliant LED Exit Sign


STANDARD | OPTIONAL

UL LISTED | DAMP LOCATION | MOUNTING CANOPY | N.Y. CITY COMPLIANT | SELF DIAGNOSTIC

## New York City Compliant Die-Cast Aluminum Exit Sign




## Dimensions, inches

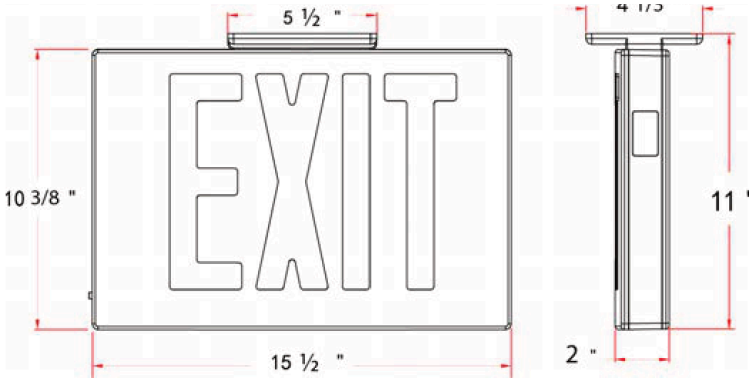


## Illumination

- Ultra bright, energy efficient, long life red LED exit sign illumination.
- New York City compliant 8" EXIT letters.

## Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## Housing

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

## Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

## Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).

## Ordering Guide

**Example: EXND-B-1-R-B-A-EM**

| # | Field | Options |
|---|---|---|
| 1 | **Model** | EXND-B (New York City compliant die-cast aluminum exit sign) |
| 2 | **No. of faces** | 1 = Single face  2 = Double face  3 = Universal single / double face |
| 3 | **Letter color** | R = Red |
| 4 | **Housing color** | W = White  B = Black  A = Aluminum |
| 5 | **Face panel** | W = White  B = Black  A = Aluminum |
| 6 | **Battery** | (blank) = AC only  EM = Battery back-up |
| 7 | **Options** | SDT = Self-diagnostics[1] |

[1]Available only with EM units

**Disclaimer:**
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



**Paraflex Industries 2006, Inc.**
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com