EXNX-B

NEMA 4X/NSF LED Exit Sign


STANDARD | OPTIONAL

LISTED | WET LOCATION | MOUNTING CANOPY | COLD | SELF DIAGNOSTIC | DUAL CIRCUIT | TAMPER PROOF | NEMA

NEMA 4X / NSF Exit Sign



Dimensions, inches

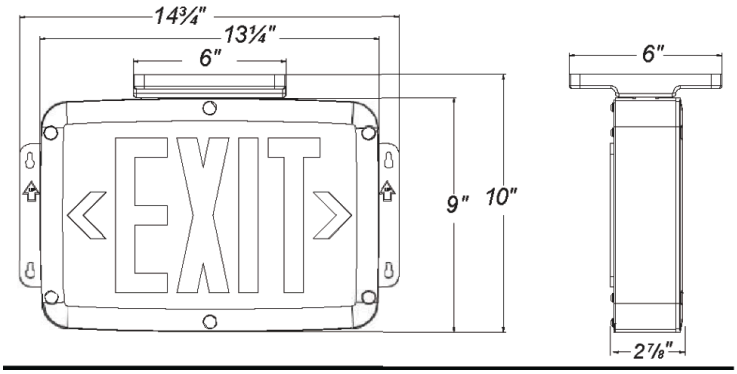

Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs exit sign illumination.

Electrical

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.6V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

Housing

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.
- Field selectable, steel knockout Chevron directional indicators.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

Warranty / Listing

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- Certified to CEC under Title 20 Regulations.
- UL certified for use in food service operations.
- UL listed for wet locations (-20°C - 50°C).

Ordering Guide

Example: EXNX-B-1-R-B-EM-SDT

#	Field	Options
1	**Model**	EXNX-B (NEMA 4X / NSF exit sign)
2	**No. of faces**	1 = Single face 2 = Double face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black
5	**Battery**	(blank) = AC only EM = Battery back-up
6	**Options**	SDT = Self-diagnostics[1] TP = Tamper-proof
7	**Dual circuit**	2C-120 = Dual circuit with 120V input[2] 2C-277 = Dual circuit with 277V input[2]

[1]Available in EM units only [2]Not available with EM units

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com