EXPC-B

Wet Location LED Exit Sign


STANDARD | OPTIONAL

LISTED | WET LOCATION | COLD | MOUNTING CANOPY | SELF DIAGNOSTIC | DUAL CIRCUIT | TAMPER PROOF

Compact Wet Location Polycarbonate Exit Sign



Dimensions, inches

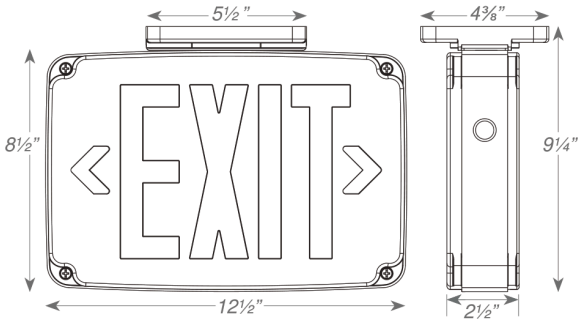

Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs exit sign illumination.

Electrical

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.[1]
- 2C-120V/2C-277V: Voltage-specific Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.[2]
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: EXPC-B-1-R-W-EM-CW

#	Field	Options
1	**Model**	EXPC-B (compact wet location polycarbonate exit sign)
2	**No. of faces**	1 = Single face 2 = Double face
3	**Letter color**	R = Red G = Green
4	**Housing color**	W = White B = Black G = Gray (with white faceplate)
5	**Battery**	(blank) = AC only EM-CW = Battery back-up (cold weather standard)
6	**Options**	SDT = Self-diagnostics[1] TP = Tamper-proof CUSTOM = Custom wording
7	**Dual circuit**	2C-120 = Dual circuit with 120V input[2] 2C-277 = Dual circuit with 277V input[2]

[1]Available only with EM units [2]Not available with EM units

Special voltage and SALIDA face plate options available. Please contact Paraflex.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com