EXRE-B

Recessed Edgelit LED Exit Sign

STANDARD | OPTIONAL

Recessed Edgelit Aluminum Exit Sign



Illumination

- Ultra bright, energy efficient, long life Red or Green LED exit sign illumination.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

Electrical

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

Housing

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in optional black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.


Options

- WM: Allows for the unit to be wall recessed mounted.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SPV: UL Listed for 208/220/240 Volt, 50/60Hz.
- Custom: Signs available with requested ·special· wording.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Dimensions, inches

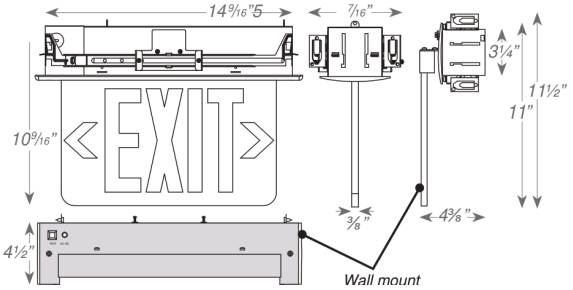

Ordering Guide

Example: EXRE-B-1-R-C-W-EM

#	Field	Options
1	**Model**	EXRE-B (recessed edgelit aluminum exit sign)
2	**No. of faces**	1 = Single face 2 = Double face
3	**Letter color**	R = Red G = Green
4	**Panel**	C = Clear[1] M = Mirror W = White
5	**Trim plate**	W = White B = Black A = Aluminum
6	**Battery**	(blank) = AC only EM = Battery back-up
7	**Options**	WM = Wall mount[1] SDT = Self-diagnostics[3] USA = Assembled in USA SPV = 208/220/240 Volt 50/60Hz[4] CUSTOM = Custom wording
8	**Dual circuit**	2C-120 = Dual circuit with 120V input[2] 2C-277 = Dual circuit with 277V input[2]

[1]With single face only [2]Not available with EM units [3]Available only with EM units [4]Not available with SDT

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com