EXTP-B

Compact Thermoplastic LED Exit Sign


STANDARD | OPTIONAL

LISTED | DAMP LOCATION | MOUNTING CANOPY | SELF DIAGNOSTIC | ASSEMBLED IN U.S.A.

Compact Thermoplastic Exit Sign



Dimensions, inches

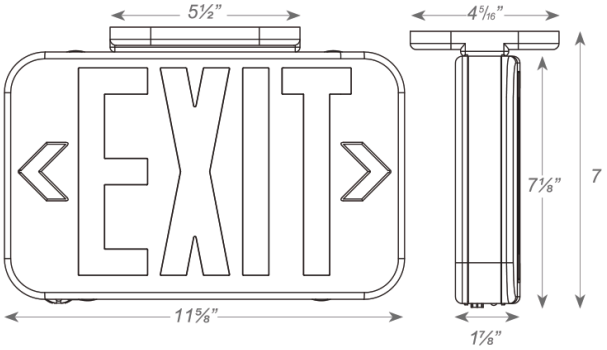

Illumination

- Ultra bright, energy efficient, long life field selectable Red or Green LED exit sign illumination.
- Selectable Red/Green (RG) version available. See ordering guide below.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

Options

- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.
- SDT: Self-Diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.[4]
- Custom: Signs available with requested "special" wording.

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C · 50°C).
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: EXTP-B-2-RG-W-2C-120

#	Field	Options
1	**Model**	EXTP-B (compact thermoplastic exit sign)
2	**No. of faces**	2 = Universal single / double face
3	**Letter color**	RG = Red/Green (field selectable)[1] R = Red[3] G = Green[3]
4	**Housing color**	W = White B = Black
5	**Battery**	(blank) = AC only EM = Battery back-up
6	**Options**	USA = Assembled in the USA SDT = Self-diagnostics[4,5] Custom = Custom working[4]
7	**Dual circuit**	2C-120 = Dual circuit with 120V input[2] 2C-277 = Dual circuit with 277V input[2]

[1]Field selectable [2]Available only with AC-only units [3]Available only with SDT & Custom [4]Not available with RG models [5]Available only with EM models

SALIDA face plate option available. Please contact Paraflex.

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com