



HBLI-V

Linear Food Processing Light, 2 ft / 4 ft, 30-140 W, IP69K



Linear Food Processing Light



2 FT



4 FT

The HB12 Series is a linear food processing light in 2 ft and 4 ft lengths, from 30 W to 140 W, with IP69K protection for washdown areas. Initial efficacy of 170 lm/W, dimmable, NSF listed.

Compliance

- NSF, cUL, UL, CE, RoHS
- DLC
- IP69K

Warranty

- 5-year warranty
- L70 > 100,000 hours


Technical Data

Model	HB12-30W	HB12-50W	HB12-70W	HB12-60W	HB12-100W	HB12-140W
Wattage	30W	50W	70W	60W	100W	140W
Length	2 ft	2 ft	2 ft	4 ft	4 ft	4 ft
Input voltage	120-277Vac, 50/60Hz					
Initial efficacy	170lm/W					
CCT	2700K-6500K					
CRI	> Ra90					
Beam angle	110°					
Dimming	Dimmable					
Power factor	> 0.9					
Lifespan	L70 > 100,000 hours					
IP rating	IP69K					
Ambient temperature	80°C	70°C	50°C	80°C	70°C	50°C
Lamp cover	PC					
Certifications	NSF, cUL, UL, CE, RoHS, DLC					
Warranty	5-year warranty					

Mounting Options



Suspension mount (standard)

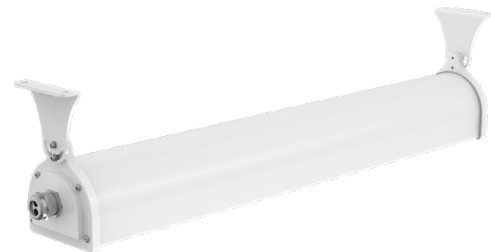

Ceiling mount




HBLI-V


Linear Food Processing Light, 2 ft / 4 ft, 30-140 W, IP69K

Product Dimension, mm [inch]

30W / 50W / 70W (2 ft): 655 x 95 x 100 mm [25.79 x 3.74 x 3.94 in]

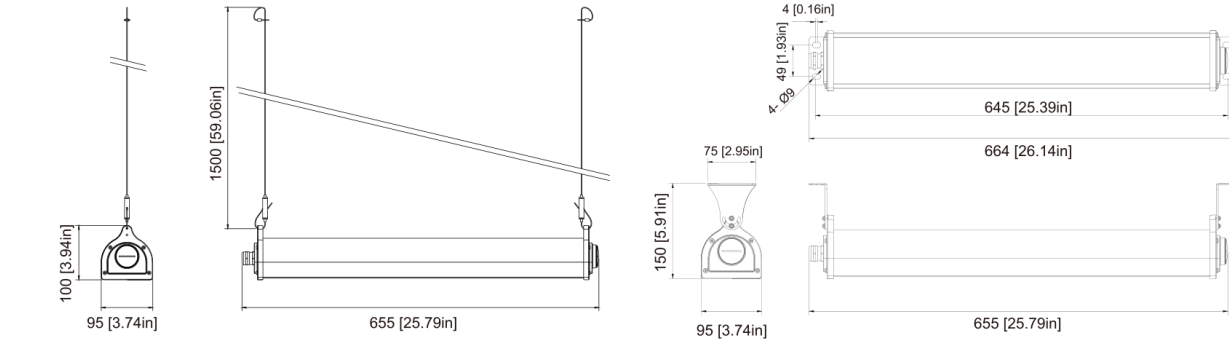

60W / 100W / 140W (4 ft): 1255 x 95 x 100 mm [49.41 x 3.74 x 3.94 in]

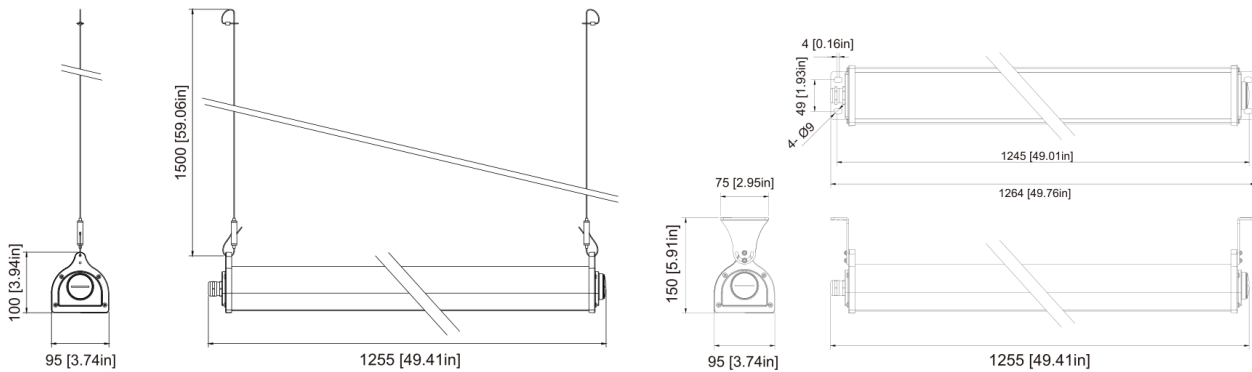

Ordering Guide

Example: HBLI-V-30W-110-D-40-120-277

1 Model	2 Wattage	3 Beam Angle	4 Dimming	5 CCT	6 Input Voltage
HBLI-V (HB12 series linear food processing light)	2 ft: 30W / 50W / 70W 4 ft: 60W / 100W / 140W	110 = 110°	D = Dimmable	2700K-6500K (e.g. 40 = 4000K)	120-277Vac

DLC: For the exact DLC listing and DLC SKU, please contact [Paraflex](https://www.paraflexlighting.com).

Disclaimer:

Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006, Inc. at the time of finalizing the order or design. Paraflex Industries 2006, Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006, Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.