HLHC-B

Hazardous Location LED Exit & Emergency Combo

STANDARD: UL LISTED · WET LOCATION · ALL LED · HAZ · REMOTE CAPACITY

OPTIONAL: SELF DIAGNOSTIC · COLD · TAMPER PROOF

Hazardous Location Exit & Emergency Combo



Illumination

- Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

Electrical

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (12W, 15W models).
- Offers 4.8W and 7.8W of remote capacity (6V/12V DC output) standard on the 12W and 15W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Pre-installed conduit hub for conduit and pendant-mount installation.

Housing

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV-stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.


Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C · 50°C).
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- NH: No lamp heads attached to the unit enabling it to be used as a remote capable EXIT sign.

Warranty / Listing

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, UL844, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- Rated for Class I, Division 2, Groups A, B, C and D.
- UL listed for wet locations (0°C · 50°C).

Dimensions, inches

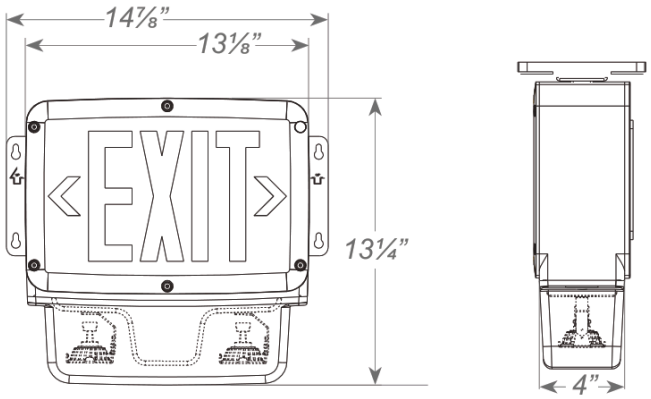

Ordering Guide

Example: HLHC-B-1-R-6-15-G

#	Field	Options
1	**Model**	HLHC-B (hazardous location exit & emergency combo)
2	**No. of faces**	1 = Single face[1] 2 = Double face[2]
3	**Letter color**	R = Red G = Green
4	**Voltage**	6 = 6 volts 12 = 12 volts
5	**Wattage**	12 = 12 watts 15 = 15 watts
6	**Housing color**	G = Gray
7	**Options**	SDT = Self-diagnostics CW = Cold weather TP = Tamper-proof NH = No heads

[1]Available only in 15W models [2]Available only in 12W models

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com