EULP-B


Low Profile LED Emergency Unit

STANDARD | OPTIONAL

LED Low Profile Thermoplastic Emergency Unit



Dimensions, inches

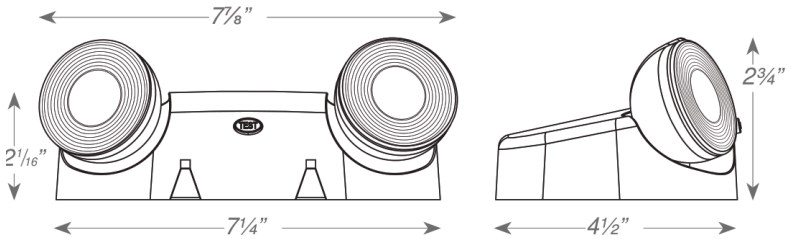

Illumination

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

Electrical

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Universal knockout pattern on back plate for surface mount.
- Suitable for wall or ceiling mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Options

- RC: Remote capacity of up to 1.0 watt.
- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).

Warranty / Listing

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C · 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

Ordering Guide

Example: EULP-B (white) EULP-B-B (black)

#	Field	Options
1	**Model**	EULP-B (low profile thermoplastic emergency unit)
2	**Housing color**	(blank) = White B = Black
3	**Options**	RC = Remote capacity[1] SPV = 120/230 Volt 50/60Hz HL = High lumen LED[1]

[1]-HL and -RC options cannot be combined; 0.5W of remote capacity is standard with -HL

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with Paraflex Industries 2006,Inc. at the time of finalizing the order or design. Paraflex Industries 2006,Inc. does not warrant or represent that the information is free from errors or omission. The information may change without notice and Paraflex Industries 2006,Inc. is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

Paraflex Industries 2006, Inc.
1346 How Lane, North Brunswick, NJ 08902
info@paraflexltg.com
paraflexltg.com